


EN



www.centiel.com

Designed
with the
future in
mind




centiel
continuous power availability

StratusPower™ 208V

Modular three-phase UPS
5 kW to 1.86 MW



PARA MÁS INFORMACIÓN o PREGUNTAS
CONSULTA A TU ASESOR,
ESTAMOS PARA AYUDARTE 

Síguenos en las redes sociales para obtener la
información más reciente de productos y servicios



www.powerfulenergyroma.com mramirez@powerfulenergyroma.com WhatsApp: 55 1406.1538

centiel




StratusPower™ The ultimate UPS for net-zero data centers

StratusPower is an innovative uninterruptible power supply (UPS), specifically designed to meet the rigorous demands of today's IT infrastructure.

Designed and manufactured in Switzerland, StratusPower's superior topology, referred to as **DARA**, ensures full availability with **no single point of failure**, providing data center operators with complete peace of mind. Furthermore, installation of StratusPower is straightforward and maintenance is simple and non-intrusive.

02

PARA MÁS INFORMACIÓN o PREGUNTAS
CONSULTA A TU ASESOR,
ESTAMOS PARA AYUDARTE 

Síguenos en las redes sociales para obtener la
información más reciente de productos y servicios



www.powerfulenergyroma.com mramirez@powerfulenergyroma.com WhatsApp: 55 1406.1538



StratusPower



Minimise your total cost of ownership while achieving the highest levels of availability and reliability for your data center.

97.6% **VFI efficiency**
Reliable semiconductor technology

525 kW/m² Space-saving footprint



- 99.999999 % availability**
No single point of failure
- Fully redundant**
DARA - fault-tolerant architecture
- Fully connected**
multi-protocol and a full range of communication channels available

- From 5 kW – 1.86 MW**
In cabinets from 5 kW to 744 kW
- Non-intrusive maintenance**
15+ years caps and smart fans
- Smart energy**
peak-shaving, self-test

PARA MÁS INFORMACIÓN o PREGUNTAS CONSULTA A TU ASESOR, ESTAMOS PARA AYUDARTE



Síguenos en las redes sociales para obtener la información más reciente de productos y servicios



DARA


Take your power availability to the next level

When it comes to availability, it's what's inside that counts

With DARA, each UPS module is independent, redundant and interconnected. Each module is a complete UPS system in its own right, with three independent power converters, a static bypass and all the hardware devices needed to safely isolate a fault without impacting the load. This maximises the mean time between failures (MTBF) and safeguards the power to your critical applications.

DARA's Distributed Decision Making technology, referred to as DDM™, elevates redundancy by enabling collaborative decision-making among all modules. This ensures the continuous power supply to your load, even during crucial decision-making moments. With DDM, the UPS can make distributed decisions, eliminating the single point of failure typically associated with master-slave technology. As a result, downtime is minimised, and critical loads remain protected.

Maximised availability at module, frame and system level

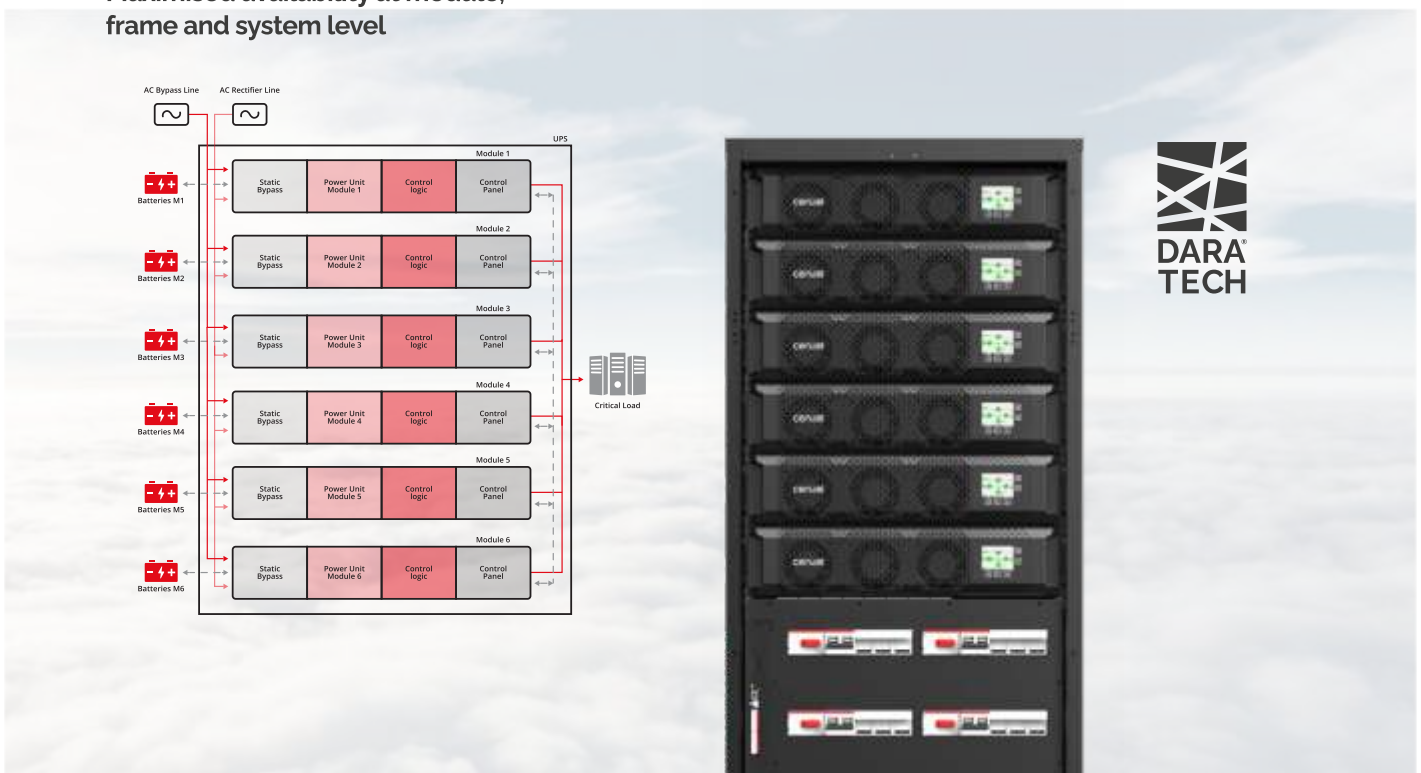


Mean time to repair (MTTR)

DARA's technology on the frame level has been designed to accommodate **non-intrusive maintenance** and to **minimise mean time to repair (MTTR)**, ensuring that any downtime is kept to an absolute minimum. For example, in the event of a power failure, frontal access to components avoids the need for removing modules, thereby reducing the risk of human error.

9-nines
Power availability






Unveiling the power of StratusPower

At Centiel, we understand our customers' pain points and have designed the StratusPower with availability and sustainability as major considerations. With StratusPower, we guarantee peace of mind by knowing that your critical infrastructure is protected by the most advanced UPS technology.



05

PARA MÁS INFORMACIÓN o PREGUNTAS
CONSULTA A TU ASESOR,
ESTAMOS PARA AYUDARTE 

Síguenos en las redes sociales para obtener la información más reciente de productos y servicios



www.powerfulenergyroma.com mramirez@powerfulenergyroma.com WhatsApp: 55 1406.1538

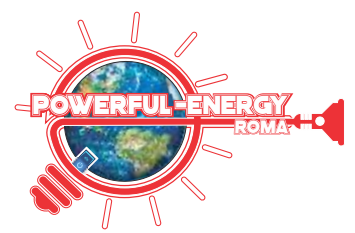

Advanced computing power

- Multi-core
- Trigonometric math unit
- Control law accelerator
- Parallel processing
- IEEE 754 double-precision math



100+ Measuring points

At the module level



External ambient monitoring

- Temperature
- Humidity
- Hydrogen
- Water leak



Cybersecure connection

Compliant IEC-4-62443-2






Advanced energy management

StratusPower provides **peak-shaving capabilities** to help businesses manage electricity usage and reduce costs. By utilising StratusPower's peak-shaving feature,

businesses can reduce their energy consumption during peak hours when electricity rates are typically at their highest. This results in significant cost savings.

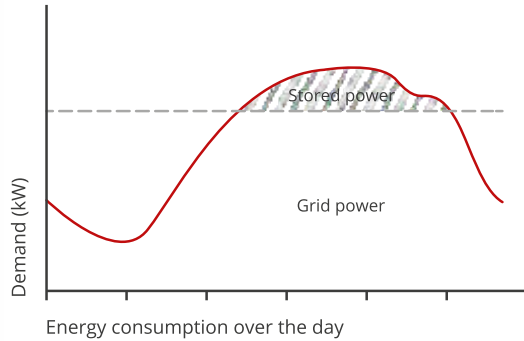

StratusPower's peak-shaving capabilities

At times of peak consumption, grid operators may charge higher prices for their power. To minimise costs for the user, a portion of the energy stored locally in the UPS can be utilised during these times, thereby reducing the amount drawn from the grid.


The UPS batteries can then be recharged with power during off-peak times.

With the future in mind

StratusPower is **future-ready** and can connect to a variety of power generation sources. It is equipped to

provide grid support and manage energy efficiently based on the specific requirements of each application.



PARA MÁS INFORMACIÓN o PREGUNTAS
CONSULTA A TU ASESOR,
ESTAMOS PARA AYUDARTE 

Síguenos en las redes sociales para obtener la información más reciente de productos y servicios





Benefits

DC Flex technology



Our unique DCFlex® technology offers unparalleled flexibility when it comes to battery storage installation and configuration, as well as preparing the infrastructure to manage both current and future energy sources.

Our UPS solution is compatible with various battery storage devices, allowing you to reuse the DC supply or to choose the option that best suits your needs and budget.

The StratusPower battery charging current capability is 500 percent higher than our closest competitors, meaning **faster charging times** and more **efficient use of your batteries**.

Robust and reliable semiconductor technology



The StratusPower incorporates proprietary technology for inverter physical isolation in the event of an IGBT failure, ensuring maximum uptime for your critical infrastructure.

The **triple-mode parallel bus** provides an extra layer of redundancy, eliminating any single point of failure in communication between frames and modules.

At Centiel, we take reliability very seriously. That's why we designed our technology with **extra-safe power of 24%**, ensuring a higher level of reliability and redundancy. With continuous operating capacity, each module can operate at 37 kW even under overload conditions. The 372 kW StratusPower UPS has the ability to operate in online mode, supporting loads up to 446 kW.

DCFlex® 240 to 600VDC

37kW UPS module capacity at continuous overload

Predictive and remote health monitoring



With its computing capabilities and more than 100 measurement points, StratusPower does the work for you, ensuring that maintenance is performed promptly and accurately. This not only saves time and effort but also improves your system's overall reliability and safety.

Bluetooth connectivity allows technicians for easy, **non-intrusive** monitoring via mobile devices, with the Centiel app providing real-time status updates and alerts.

StratusPower provides advanced **cybersecurity** features in compliance with **IEC-4-62443-2**, making certain that your critical data and systems are protected from cyber threats.


Exceeding performance expectations



With a **THDi of less than 1 percent**, StratusPower provides excellent performance that exceeds regulatory requirements.

The UPS is able to handle 124% of continuous overload and 125% overload for 1 minute, ensuring uninterrupted power delivery during times of peak demand.

A **short circuit capability above 3xIn** safeguards your equipment and system integrity despite electrical faults.



Tangible sustainability:
We help your data center achieve CO₂ emissions targets through our solutions and services.



Energy efficiency

StratusPower is designed with energy efficiency in mind, using the latest technology to reduce energy consumption and minimise losses.

97.6% (VFI) efficiency

Zero waste


StratusPower is manufactured using eco-friendly materials, ensuring that our products have minimal impact on the environment.

30+ years of UPS design life
15+ years of life on replaceable components

Net zero by design


Our company is continuously committed to improving our sustainability practices, and we manufacture StratusPower using environmentally friendly processes to minimize our impact on the environment.

95% of the energy used for production testing is recycled

PARA MÁS INFORMACIÓN o PREGUNTAS
CONSULTA A TU ASESOR,
ESTAMOS PARA AYUDARTE 

Síguenos en las redes sociales para obtener la información más reciente de productos y servicios





centiel



The versatile Universal Rack UPS solution

Available as a Universal Rack UPS, StratusPower offers a blend of technical and commercial benefits tailored to meet a variety of power protection needs. This adaptable system includes the UPS, communication components, battery breakers and output switches, making it ideal for integrated IT, telecom or other critical processes. The UPS integrates seamlessly into **any 19-inch rack** regardless of the rack manufacturer.

With its versatile design, StratusPower simplifies the engineering and deployment of custom power protection solutions. System integrators can leverage their expertise and implement unique solutions to meet

specific design requirements. The UPS can be seamlessly integrated into weatherproof enclosures, making it ideal for applications in harsh environments.

The Universal Rack Solution provides **efficient heat management** by directing warm air to the rear of the cabinet for optimal cooling without affecting the entire enclosure.

For system integrators, the Universal Rack solution offers efficient **customisation with standard products** and the opportunity to add significant local value to their power protection solutions.

The Universal Rack offers **versatile battery placement options**, allowing either top or bottom customisation to suit specific preferences and operational requirements.

Thanks to the minimal size of the **5/10/12.5 and 15 kW** modules, the Universal Rack UPS solution is available **in compact depths from 600 mm** providing a space-saving solution without compromising performance.

From 600mm deep cabinets



UPS modules

Flexible integration of **n-battery modules** in any frame position

10

PARA MÁS INFORMACIÓN o PREGUNTAS
CONSULTA A TU ASESOR,
ESTAMOS PARA AYUDARTE



Síguenos en las redes sociales para obtener la información más reciente de productos y servicios



www.powerfulenergyroma.com mramirez@powerfulenergyroma.com WhatsApp: 55 1406.1538



Universal Rack UPS solution

Available UPS power rating configurations

			
Power per rack	From 5 to 15 kW	From 5 to 30 kW	From 5 to 60 kW
Power per module (kVA =KW)	5/10/12.5/15 kW	5/10/12.5/15 kW	5/10/12.5/15 kW
N-modules	1	1 to 2	1 to 4
Height	8 HU	12 HU	21 HU

The Universal Rack UPS includes

- Fits seamlessly into any 19" rack**
- Up to four UPS modules**
online double conversion
- Individual module display**
- Electrical distribution**
- Output parallel isolator**
1 x module
- System manual bypass**
- Connectivity board**
5x dry output, 5x dry input, USB, RS485, Bluetooth, Ethernet, slot for SNMP
- Up to four battery modules in a single cabinet**
- Free placement of internal battery modules**
bottom or top
- Available in depth from 600 mm**



Unmatched flexibility and scalability for diverse power needs

Comprehensive options for StratusPower modules

Designed to meet a variety of applications, StratusPower offers a range of modules to meet your needs, including compact modules up to 15 kW and more powerful modules up to 31 kW. The adaptability extends further

with the capability to consolidate power in a single cabinet, spanning from 5 kW to an impressive 744 kW. Scaling doesn't stop there—StratusPower cabinets can be seamlessly expanded to a staggering 1.86 MW.

Available models



Module type	SM 05 / 10 / 12 / 15 -2V-S	SM 25 / 31 -2V-M
Power per module (kVA =KW)	5/10/12.5/15 kW	25 / 31 kW
Weight (kg)	19	38 / 42
Dimensions h x w x d (mm)	132 x 443 x 490	132 x 581x 800

StratusPower SM05/10/12/15 -2V-S



Model	CAB-SP060-l080-2S-A1	CAB-SP060-l240-2S-A0	CAB-SP120-l320-4S-B0
Modules	2 x SM05/10/12/15-2V-S	2 x SM05/10/12/15-2V-S	4 x SM05/10/12/15-2V-S
Maximum power / cabinet	30 kW	30 kW	60 kW
Internal battery capacity	80 x (7/9Ah)	240 x (7/9Ah)	320 x (7/9Ah) or 80 x (28Ah)
Dimensions h x w x d (mm)	1315 x 510 x 815	1980 x 510 x 815	1980 x 730 x 815
Footprint	0.41 m ²	0.41 m ²	0.59 m ²



Model	CAB-SP120-E-4S-A1	CAB-SP180-E-6S-A0	CAB-SP301-E-10S-B0
Modules	4 x SM05/10/12/15-2V-S	6 x SM05/10/12/15-2V-S	10 x SM05/10/12/15-2V-S
Maximum power / cabinet	60 kW	90 kW	150 kW
Internal battery capacity	External	External	External
Dimensions h x w x d (mm)	1315 x 510 x 815	1980 x 510 x 815	1980 x 730 x 815
Footprint	0.41 m ²	0.41 m ²	0.59 m ²



StratusPower
SM 25 / 31 -2V-M

Up to
744 kW
per frame

Ultra-compact model



Ultra-compact model



Model	CAB-SP625T-E-10M-LT-K	CAB-SP1250T-E-20M-LT-2K
Modules	10 x SM25 / 31 -2V-M	20 x SM25 / 31 -2V-M
Nom. power / cabinet	186 kW	620 kW
Dimensions h x w x d (mm)	1982 x 656 x 900	1982 x 1312 x 900
Footprint	0.59 m ²	1.18 m ²



Model	CAB-SP375(B/T)-E-6M-(LT/AV)-K	CAB-SP750(B/T)-E-12M-(LT/AV)-K
Modules	6 x SM25 / 31 -2V-M	12 x SM25 / 31 -2V-M
Nom. power / cabinet	186 kW	372 kW
Dimensions h x w x d (mm)	1982 x 656 x 900	1982 x 1312 x 900
Footprint	0.59 m ²	1.18 m ²



Model	CAB-SP1125(B/T)-E-18M-(LT/AV)-K	CAB-SP1500(B/T)-E-24M-(LT/AV)-K
Modules	18 x SM25 / 31 -2V-M	24 x SM25 / 31 -2V-M
Nom. power / cabinet	558 kW	744 kW
Dimensions h x w x d (mm)	1982 x 1968 x 900	1982 x 2624 x 900
Footprint	1.77 m ²	2.36 m ²

**PARA MÁS INFORMACIÓN o PREGUNTAS
CONSULTA A TU ASESOR,
ESTAMOS PARA AYUDARTE**



Síguenos en las redes sociales para obtener la información más reciente de productos y servicios



Technical Datasheet

		CAB-SP060-l080-2S-A1	CAB-SP120-E-4S-A1			
		CAB-SP060-l240-2S-A0	CAB-SP120-l320-4S-B0	CAB-SP180-E-6S-A0	CAB-SP301-E-10S-B0	
General Data	Model					
	Module type	SM05/10/12/15-2V-S	SM05/10/12/15-2V-S	SM05/10/12/15-2V-S	SM05/10/12/15-2V-S	
	Nom. power per module [kVA = kW]	5 / 10 / 12.5 / 15	5 / 10 / 12.5 / 15	5 / 10 / 12.5 / 15	5 / 10 / 12.5 / 15	
	Cont. overload per module [kVA = kW]	6 / 12 / 15 / 18	6 / 12 / 15 / 18	6 / 12 / 15 / 18	6 / 12 / 15 / 18	
	Nom. power per frame [kVA = kW]	30	60	90	150	
	Cont. overload per frame [kVA = kW]	36	72	108	180	
	Number of modules per frame	1-2	1-4	1-6	1-10	
	Max. power per system [kVA = kW]	900	900	900	900	
Topology / technology	Online double conversion / DARA (Distributed Active Redundant Architecture)					
Input	Rectifier	Input wiring	3 Ph + N + PE			
		Rated voltage	200/208/220 Vac			
		Voltage range	For loads <100% (-25%, +20%), <80% (-32.5%, +20%), <60% (-35%, +20%)			
		Input frequency	30-70 Hz			
		Total Harmonic Distortion	THDi<0.8% for linear load, THDi<3% for nonlinear load			
		Input power factor	0,99			
	Bypass	Input wiring	3 Ph + N + PE			
		Rated voltage	±30...±10% (Voltage) (According to VFI-SS-111)			
		Input frequency	50/60 ±2/4% (selectable)			
	Battery	Rated voltage	120 - 300 Vdc (the number of batteries can be selected)			
		Internal batteries (7/9Ah)	I080: 80 I240: 240	E: External I320: 320	E: External	E: External
		Type	Lead-Acid / NiCad / Lithium / Zink / Salt / others...			
Blocks[LA]		10-25				
Output	Inverter	Output wiring	3Ph+N+PE			
		Voltage	200/208/220 Vac			
		Frequency	Tracking the bypass input (Online Mode); 50 / 60 Hz ± 0.05% (Battery Mode)			
		Output power factor	1			
		Efficiency	97,6%			
		Overload capacity	Inverter: 124% continuous, 125% for 10min, 150% for 60 sec			
	Bypass	Efficiency	99,4%			
	Environment	Operating temperature	0-40°C (No power derating)			
Storage temperature		-40-70°C				
Relative humidity		0%-95% (No condensing)				
Maximum operating altitude		1000 m. above 1000 m, derating 1% for each additional 100 m				
Others	Dimensions (H x W x D) [mm]	1315 x 510 x 815 1980 x 510 x 815	1315 x 510 x 815 1980 x 730 x 815	1980 x 510 x 815	1980 x 730 x 815	
	Certifications	EN/IEC 62040-1 EN/IEC 62040-2 EN/IEC 62040-3 CE UKCA EAC RoHS				
	Communications	RS485, USB, Dry contacts, Ethernet, Bluetooth				

+ The information in this document is subject to change without notice and should not be construed as a commitment by Centiel S.A.
TDS_Rev1.2_25.04.2023



Technical Datasheet

Model		CAB-SP375(B)-E-6M-(LT/AV)-K	CAB-SP750(B)-E-12M-(LT/AV)-K	CAB-SP1125(B)-E-18M-(LT/AV)-K	CAB-SP1500(B)-E-24M-(LT/AV)-K
		CAB-SP375(T)-E-6M-(LT/AV)-K	CAB-SP750(T)-E-12M-(LT/AV)-K	CAB-SP1125(T)-E-18M-(LT/AV)-K	CAB-SP1500(T)-E-24M-(LT/AV)-K
General Data	Module type	SM 25 / 31 -2V-M	SM 25 / 31 -2V-M	SM 25 / 31 -2V-M	SM 25 / 31 -2V-M
	Nom. power per module [kVA = kW]	25 / 31	25 / 31	25 / 31	25 / 31
	Cont. overload per module [kVA = kW]	30 / 37	30 / 37	30 / 37	30 / 37
	Nom. power per frame [kVA = kW]	375	750	1125	1500
	Cont. overload per frame [kVA = kW]	223	446	669	892
	Number of modules per frame	1-6	1-12	1-18	1-24
	Max. power per system [kVA = kW]	1860	1860	1860	1860
	Topology / technology	Online double conversion / DARA (Distributed Active Redundant Architecture)			
Rectifier	Input wiring	3 Ph + N + PE			
	Rated voltage	200/208/220 Vac			
	Voltage range	For loads <100% (-25%, +20%), <80% (-32.5%, +20%), <60% (-35%, +20%)			
	Input frequency	30-70 Hz			
	Total Harmonic Distortion	THDi<0.8% for linear load, THDi<3% for nonlinear load			
	Input power factor	0,99			
Bypass	Input wiring	3 Ph + N + PE			
	Rated voltage	±30...±10% (Voltage) (According to VFI-SS-111)			
	Input frequency	50/60 ±2/4% (selectable)			
Battery	Rated voltage	120 - 300 Vdc (the number of batteries can be selected)			
	Internal batteries (7/9Ah)	E: External			
	Type	Lead-Acid / NiCad / Lithium / Zink / Salt / others...			
	Blocks[LA]	10-25			
Charger (Amps per module)	50				
Inverter	Output wiring	3Ph+N+PE			
	Voltage	200/208/220 Vac±1%			
	Frequency	Tracking the bypass input (Online Mode); 50 / 60 Hz ± 0.05% (Battery Mode)			
	Output power factor	1			
	Efficiency	97,6%			
	Overload capacity	Inverter: 124% continuous, 125% for 10min, 150% for 60 sec			
Bypass	Efficiency	99,4%			
Environment	Operating temperature	0-40°C (No power derating)			
	Storage temperature	-40-70°C			
	Relative humidity	0%-95% (No condensing)			
	Maximum operating altitude	1000 m. above 1000 m, derating 1% for each additional 100 m			
Others	Dimensions (H x W x D) [mm]	1982 x 656 x 900	1982 x 1312 x 900	1982 x 1968 x 900	1982 x 2624 x 900
	Certifications	EN/IEC 62040-1 EN/IEC 62040-2 EN/IEC 62040-3 CE UKCA EAC RoHS			
	Communications	RS485, USB, Dry contacts, Ethernet, Bluetooth			

+ The information in this document is subject to change without notice and should not be construed as a commitment by Centiel S.A.
TDS_Rev1.0_30.04.2023


15

PARA MÁS INFORMACIÓN o PREGUNTAS
CONSULTA A TU ASESOR,
ESTAMOS PARA AYUDARTE



Síguenos en las redes sociales para obtener la
información más reciente de productos y servicios





centiel

continuous power availability


BPC SP. INESCO.02142EN



www.centiel.com



CE EAC UK
CA

PARA MÁS INFORMACIÓN o PREGUNTAS
CONSULTA A TU ASESOR,
ESTAMOS PARA AYUDARTE 

Síguenos en las redes sociales para obtener la
información más reciente de productos y servicios



www.powerfulenergyroma.com mramirez@powerfulenergyroma.com WhatsApp: 55 1406.1538